





Bluffton

Models: KKF220C KKF220SS


KKF220MB

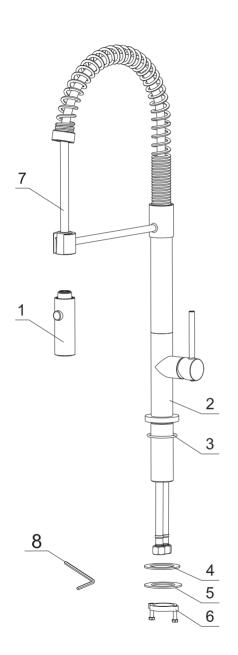


Qty.
1
1
1
1
1
1
1
1

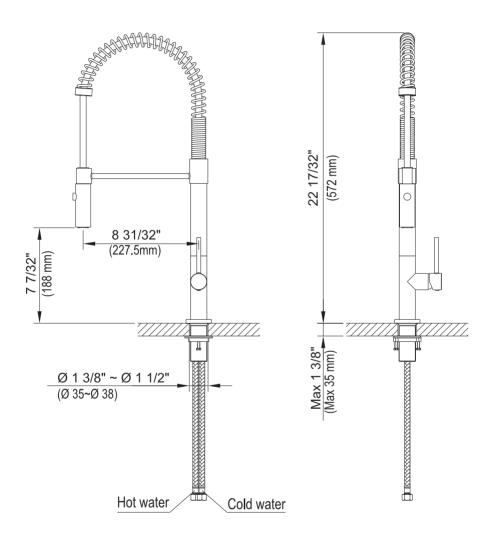

STEP 1




 Remove the mounting hardware(6), metal washer(5), rubber washer(4) from the main body(2);




2. Insert the main body into the hole with the "O" ring(3), refix the rubber washer(4), metal washer(5), mounting hardware(6) from the bottom.

INSTALLATION GUIDE




3. After adjusting the direction of the main body(2), tighten the mounting hardware (6) with hands and tighten the screws(7) with a Philips screwdriver.

STEP 4




4. Connect the waterlines to outlet tightly. Turn on the outlet and check for leaks.

How to operate the handle:




- 1) Open the handle lever to turn water on. Push to turn off.
- 2) Turn the handle lever to the left to increase hot water flow with higher water temperature, while lower the water temperature by operating reversely.

Spray



- 1) When first turned on, water comes from aerator.
- 2) Press the button, water comes from nozzles. Can alternate water flow by pressing the button.

REPLACEMENT PARTS

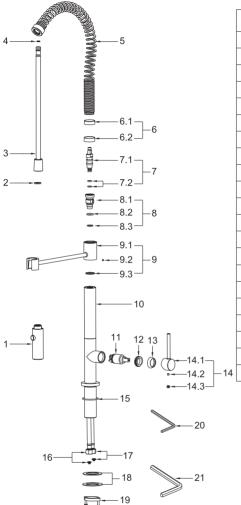

No.	Description	Finishes/Colors	Item No.
1	Spray	C, SS, MB	500302239**
2	Washer		7002003583
3	Spray Hose	C, SS, MB	500401839**
4	Washer		7002004533
5	Spring Assembly	C, SS, MB	500600366*
6	Protective Sleeve		7003006830
7	Retainer		4006018835
8	Rotation Core		4006018105
9	Spray Support Assembly	C, SS, MB	500200893*
10	Main Body Assembly	C, SS, MB	100300520**
11	25H Cartridge		2006001420
12	Nut		4006017795
13	Сар	C, SS, MB	500101446*
14	Handle	C, SS, MB	200100392*
15	O-Ring B		7001002343
16	Waterline		5004206382
17	Waterline		5004206382
18	Rubber & Metal Washers		7002003735
19	Mounting Nut & Screws		4006018501
20	Hex Wrench		5006000370
21	Hex Wrench		5006003140

** Denotes faucet component color options:

C - Chrome

SS - Spot Free Stainless Steel

MB - Matte Black